


Pneumatic Equipment

Shock Absorber (AC AD ACD HR Series)



Ordering Code

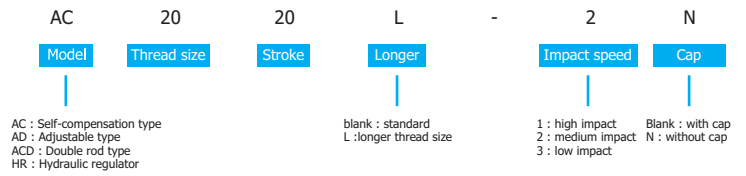

Specifications

Model	Thread size	Stroke (mm)	Max energy absorber (Nm)	Max impact speed m/s		
				1	2	3
AC0806	M8x1.0	6	1.8	2	1.2	0.8
AC1005	M10x1.0	5	3.2	2.6	1.5	0.8
AC1008	M10x1.0	8	3.2	2.6	1.5	0.8
AC1210	M12x1.0	10	6	2.6	1.5	0.8
AC1412	M14x1.5	12	20	2.6	1.5	0.8
AC1415	M14x1.5	15	20	2.6	1.5	0.8
AC1416	M14x1.5	16	20	2.6	1.5	0.8
AC2020	M20x1.5	20	35	3.2	2	1.2
AC2020L	M20x1.5	20	35	3.2	2	1.2
AC2030	M20x1.5	30	46	3.2	2	1.2
AC2050	M20x1.5	50	62	4.2	2.6	1.5
AC2525	M25x1.5	25	78	3.2	2	1.2
AC2540	M25x1.5	40	122	3.5	2.2	1
AC2580	M25x1.5	80	198	4	3	1.5
AC3660	M36x1.5	60	260	3	2	1
ACD2030	M20x1.5	30	46	3.2	2	1.2
ACD2045	M20x1.5	45	52	3.2	2	1.2
AD1410	M14x1.5	10	15		3.2	
AD2016	M20x1.5	16	28		3.2	
AD2016L	M20x1.5	16	28		3.2	
AD2020	M20x1.5	20	35		3.2	
AD2020L	M20x1.5	20	35		3.2	
AD2525	M25x1.5	25	78		3.2	
AD2540	M25x1.5	40	122		3.2	
AD3650	M36x1.5	50	220		3.2	
AD4225	M42x1.5	25	260		3.5	
AD4250	M42x1.5	50	500		4.5	
AD4275	M42x1.5	75	750		4.5	
HR30		30	10-550		0.5-30mm/s (load 100kg)	
HR60		60	10-550		0.5-30mm/s (load 100kg)	
HR100		100	10-550		0.5-30mm/s (load 100kg)	